

# 強制式輸送滾筒


Fixed Drive Roller

# 9T-2

內牙軸心 Female threaded spindle

9T-2 雙排 鐵齒輪，使用RS40鏈條(1/2 x 5/16")

9T-2 plastic sprocket for chain 1/2 x 5/16"

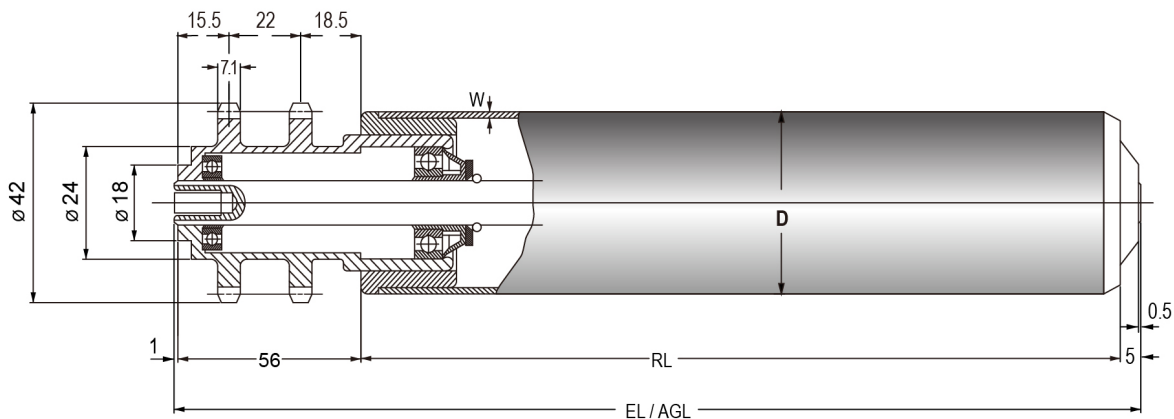

$$EL/AGL = RL + 62mm$$

外管材質 Tube Quality	管徑及管厚 D x W	齒輪/齒數 No. Teeth	料號:滾筒長度RL必須註明 軸心外徑 mm 12mm/M8*20 & 14mm/M8*20
ABS	50*2.8	9	FD2P50.28.12.9 FD2P50.28.14.9
	60*3.0	9	FD2P60.30.12.9 FD2P60.30.14.9
鋼鍍鋅 Zinc plated steel	42*2.0	9	FD2Z42.20.12.9 FD2Z42.20.14.9
	50*1.5	9	FD2Z50.15.12.9 FD2Z50.15.14.9
	57*1.5	9	FD2Z57.15.12.9 FD2Z57.15.14.9
	60*2.0	9	FD2Z60.20.12.9 FD2Z60.20.14.9
不鏽鋼 Stainless steel	42*2.0	9	FD2S42.20.12.9 FD2S42.20.14.9
	50*1.5	9	FD2S50.15.12.9 FD2S50.15.14.9
	60*2.0	9	FD2S60.20.12.9 FD2S60.20.14.9
包層管 Stainless-steel-clad tubes	42*1.5	9	FD2C42.15.12.9 FD2C42.15.14.9
	50*1.5	9	FD2C50.15.12.9 FD2C50.15.14.9
	57*1.5	9	FD2C57.15.12.9 FD2C57.15.14.9
	60*2.0	9	FD2C60.20.12.9 FD2C60.20.14.9

鋼製雙蓋工業軸承 Precision bearing 6002ZZ

光圓鐵軸心 Spindle Steel self color

訂貨時請註明EL的長度 Please specify the roller length EL when ordering

可供應鋼製染黑齒輪(訂貨時請註明) Available in carbon steel with black finish sprockets