


堆積式輸送滾筒

Friction accumulating conveyor roller

9T-2

內牙軸心 Female threaded spindle

9T-2 雙排<鐵>齒輪,使用RS40鏈條(1/2*5/16")
9T-2 plastic sprocker for chain 1/2x5/16"

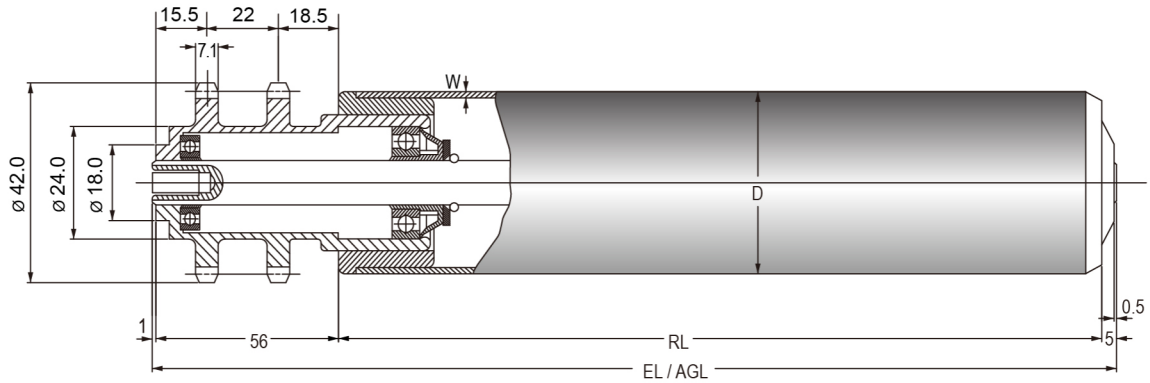

$$EL/AGL = RL + 62 \text{ mm}$$

外管材質 Tube Quality	管徑及管厚 D x W	齒輪/齒數 No. Teeth	料號: 滾筒長度RL必須註明 軸心外徑 mm	
			12mm/M8*20	14mm/M8*20
ABS	50 X 2.8	9	AF1P50.28.12.9	AF1P50.28.14.9
	60 X 3.0	9	AF1P60.30.12.9	AF1P60.30.14.9
鋼鍍鋅 Zinc plated steel	50 X 1.5	9	AF1Z50.15.12.9	AF1Z50.15.14.9
	57 X 1.5	9	AF1Z57.15.12.9	AF1Z57.15.14.9
	60 X 2.0	9	AF1Z60.20.12.9	AF1Z60.20.14.9
不鏽鋼 Stainless steel	50 X 1.5	9	AF1S50.15.12.9	AF2S50.16.14.9
	57 X 1.5	9	AF1S50.15.12.9	AF1S50.15.14.9
	60 X 2.0	9	AF1S60.20.12.9	AF1S60.20.14.9
包層管 Stainless-steel-clad tubes	50 X 1.5	9	AF1C50.15.12.9	AF1C50.15.14.9
	57 X 1.5	9	AF1C57.15.12.9	AF1C57.15.14.9
	60 X 2.0	9	AF1C60.20.12.9	AF1C60.20.14.9

鋼製雙蓋工業軸承 Precision bearing 6002ZZ

光圓鐵軸心 Spindle Steel self color

訂貨時請註明EL的長度 Please specify the roller length EL when ordering

可供應鋼製染黑齒輪(訂貨時請註明) Available in carbon steel with black finish sprockets