


錐型自由滾筒

Tapered universal conveyor roller

內牙軸心 Female threaded spindle

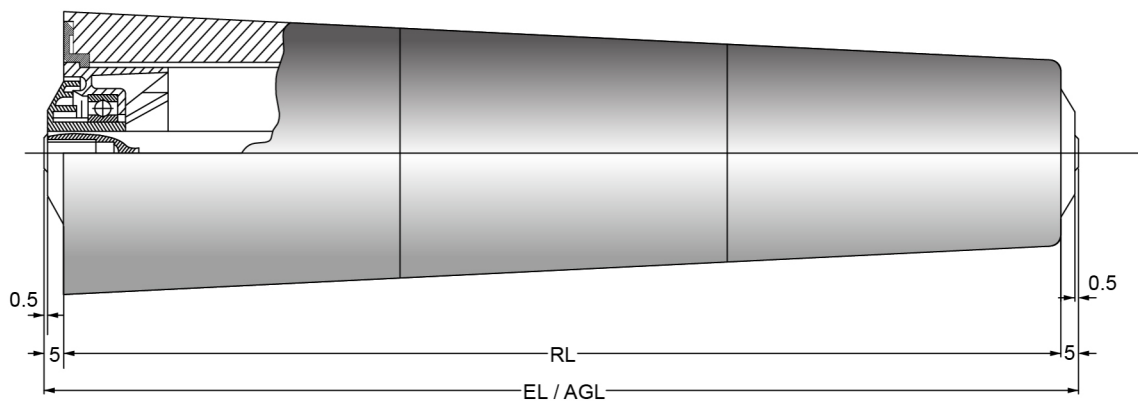

$$EL/AGL = RL + 10 \text{ mm}$$

外管材質 Tube Quality	管徑及管厚 D x W	齒輪/齒數 No. Teeth	外管管徑 最小/最大 Min./Max.	料號:滾筒長度RL必須註明 軸心外徑 mm	
				12mm/M8*20	14mm/M8*20
鋼製內管 外塑膠 錐型管 Tapered Plastic Element on inner Steel tube	50 * 1.5	56.6/71.2	250	TU0Z.50.15.12.250	
		52.5/71.2	300	TU0Z.50.15.12.300	
		56.6/77.6	350	TU0Z.50.15.12.350	
		52.5/77.6	400	TU0Z.50.15.12.400	
		56.6/84.0	450	TU0Z.50.15.12.450	
		52.5/84.0	500	TU0Z.50.15.12.500	
		56.6/90.4	550	TU0Z.50.15.12.550	
		52.5/90.4	600	TU0Z.50.15.12.600	
		56.6/96.8	650	TU0Z.50.15.12.650	
		52.5/96.8	700	TU0Z.50.15.12.700	
		56.6/103.2	750	TU0Z.50.15.12.750	
		52.5/103.2	800	TU0Z.50.15.12.800	
		56.6/109.6	850	TU0Z.50.15.12.850	
52.5/109.6	900	TU0Z.50.15.12.900			

◎鋼製雙蓋工業軸承 6002ZZ

◎光圓鐵軸心

※訂貨時請註明EL的長度

◎Precision bearing 6002ZZ

◎Spindle Steel self color

※Please specify the roller length EL when ordering