


錐型自由滾筒

Tapered universal conveyor roller

彈簧壓入式 Spring loaded spindle

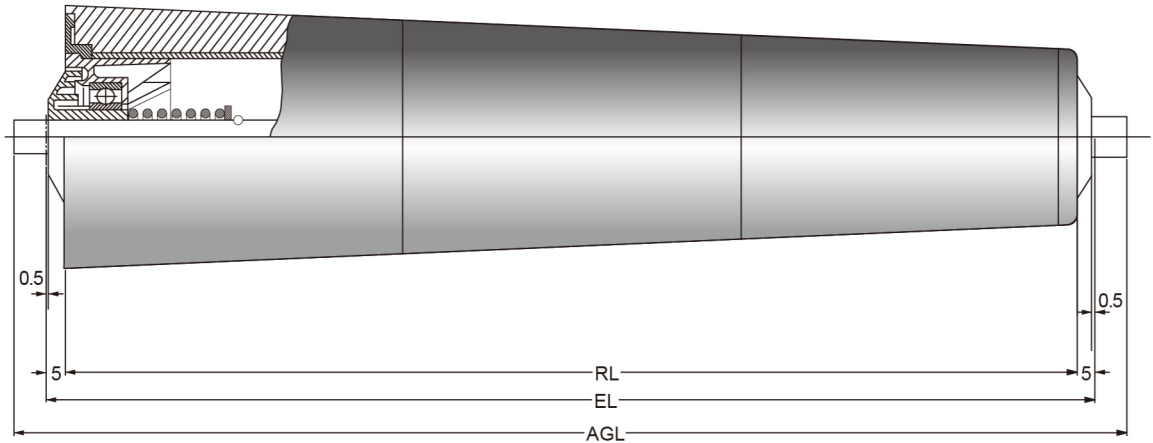

軸心外徑mm

- 10 EL=RL+10:AGL=EL+20mm
- 12 EL=RL+12:AGL=EL+24mm
- 14 EL=RL+14:AGL=EL+28mm

外管材質 Tube Quality	外管管徑 D x W	長度 RL	料號: 滾筒長度RL必須註明軸心外徑 mm		
			10mm/M6*15	12mm/M8*20	14mm/M8*20
鋼製內管 外塑膠 錐型管 Tapered Plastic Element on inner Steel tube	56.6/71.2	250	TS0Z.50.15.10.250	TS0Z.50.15.12.250	TS0P.50.15.14.250
	52.5/71.2	300	TS0Z.50.15.10.300	TS0Z.50.15.12.300	TS0P.50.15.14.300
	56.6/77.6	350	TS0Z.50.15.10.350	TS0Z.50.15.12.350	TS0P.50.15.14.350
	52.5/77.6	400	TS0Z.50.15.10.400	TS0Z.50.15.12.400	TS0P.50.15.14.400
	56.6/84.0	450	TS0Z.50.15.10.450	TS0Z.50.15.12.450	TS0P.50.15.14.450
	52.5/84.0	500	TS0Z.50.15.10.500	TS0Z.50.15.12.500	TS0P.50.15.14.500
	56.6/90.4	550	TS0Z.50.15.10.550	TS0Z.50.15.12.550	TS0P.50.15.14.550
	52.5/90.4	600	TS0Z.50.15.10.600	TS0Z.50.15.12.600	TS0P.50.15.14.600
	56.6/96.8	650	TS0Z.50.15.10.650	TS0Z.50.15.12.650	TS0P.50.15.14.650
	52.5/96.8	700	TS0Z.50.15.10.700	TS0Z.50.15.12.700	TS0P.50.15.14.700
	56.6/103.2	750	TS0Z.50.15.10.750	TS0Z.50.15.12.750	TS0P.50.15.14.750
	52.5/103.2	800	TS0Z.50.15.10.800	TS0Z.50.15.12.800	TS0P.50.15.14.800
	56.6/109.6	850	TS0Z.50.15.10.850	TS0Z.50.15.12.850	TS0P.50.15.14.850
	52.5/109.6	900	TS0Z.50.15.10.900	TS0Z.50.15.12.900	TS0P.50.15.14.900

◎鋼製雙蓋工業軸承 6002ZZ

◎光圓鐵軸心

※訂貨時請註明EL的長度

◎Precision bearing 6002ZZ

◎Spindle Steel self color

※Please specify the roller length EL when ordering