


錐型強制滾筒

Tapered universal conveyor roller

內牙軸心 Female threaded spindle

14T-2 雙排 塑/鐵 齒輪, 使用RS40鏈條(1/2*5/16")
14T-2 Plastic sprocket for chain 1/2*5/16"

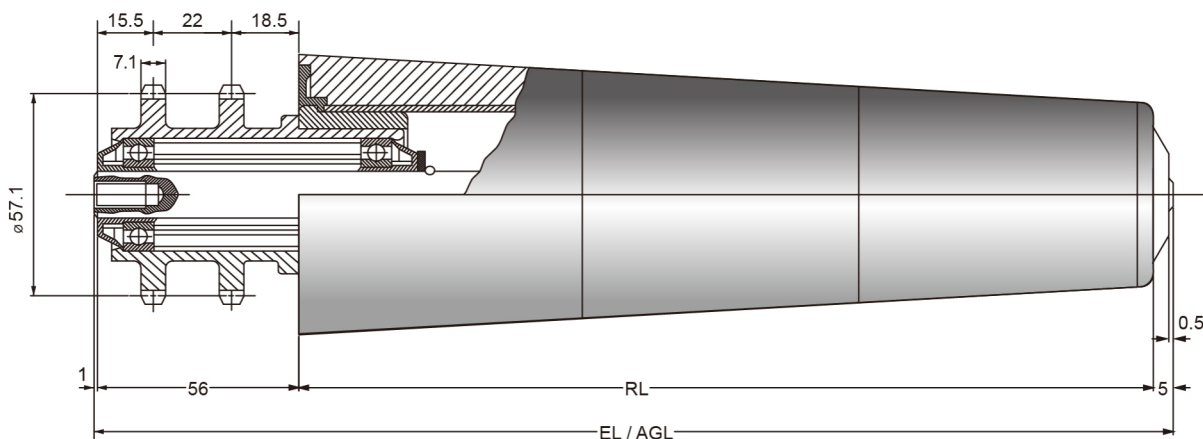

$$EL / AGL = RL + 62 \text{ mm}$$

外管材質 Tube Quality	管徑及管厚 D x W	齒輪/齒數 No. Teeth	外管管徑 最小/最大 Min./Max.	料號:滾筒長度RL必須註明 軸心外徑 mm	
				12mm/M8*20	14mm/M8*20
鋼製內管 外塑膠 錐型管 Tapered Plastic Element on inner Steel tube	50 * 1.5	56.6/71.2	250	TF2Z.50.15.12.250	TF2Z.50.15.14.250
		52.5/71.2	300	TF2Z.50.15.12.300	TF2Z.50.15.14.300
		56.6/77.6	350	TF2Z.50.15.12.350	TF2Z.50.15.14.350
		52.5/77.6	400	TF2Z.50.15.12.400	TF2Z.50.15.14.400
		56.6/84.0	450	TF2Z.50.15.12.450	TF2Z.50.15.14.450
		52.5/84.0	500	TF2Z.50.15.12.500	TF2Z.50.15.14.500
		56.6/90.4	550	TF2Z.50.15.12.550	TF2Z.50.15.14.550
		52.5/90.4	600	TF2Z.50.15.12.600	TF2Z.50.15.14.600
		56.6/96.8	650	TF2Z.50.15.12.650	TF2Z.50.15.14.650
		52.5/96.8	700	TF2Z.50.15.12.700	TF2Z.50.15.14.700
		56.6/103.2	750	TF2Z.50.15.12.750	TF2Z.50.15.14.750
		52.5/103.2	800	TF2Z.50.15.12.800	TF2Z.50.15.14.800
		56.6/109.6	850	TF2Z.50.15.12.850	TF2Z.50.15.14.850
		52.5/109.6	900	TF2Z.50.15.12.900	TF2Z.50.15.14.900

◎鋼製雙蓋工業軸承 6002ZZ

◎光圓鐵軸心

※訂貨時請註明EL的長度

※可供應鋼製染黑齒輪(訂貨時請說明需求)

◎Precision bearing 6002ZZ

◎Spindle Steel self color

※Please specify the roller length EL when ordering

※Available in carbon steel with black finish sprockets